



720i™ Series

Programmable HMI Indicator/Controller



Universal

Standard Features

- LCD display size: panel mount (3.8 in x 1.2 in), universal (5.3 in x 1.5 in)
- 4 softkeys
- Truck in/out, 1,000-ID memory
- Process control engine ProAction PCE define conditions and actions
- Data storage onboard, ProAction DBE user-defined
- 8 digital I/O (expandable)
- 1 option slot for pluggable options
- 20 auxiliary print formats
- Time & date
- Audit trail tracking and alibi storage
- Peak hold
- Rate of change
- Accumulator
- Multi-range/interval
- Local/remote
- 2 full duplex serial ports
- One PS-2 keyboard port
- Header for fiber optic, Ethernet or USB
- Configurable with Revolution® software

Optional Communication:

- | | | |
|-------------------|---------------|---------------------|
| • Ethernet TCP/IP | • Fiber optic | • Wi-Fi |
| • RS-485 4 wire | • USB | • Network Protocols |



Panel Mount



CPU Enclosure

Specifications

Power:

Line voltages: 90 or 264 VAC
 DC voltages: 9-36 VDC
 Frequency: 50 or 60 Hz
 Power consumption: 25 watts maximum

Excitation Voltage:

10 VDC, 16 x 350 Ω or 32 x 700 Ω load cells

Analog Signal Input Range:

-10 mV to +45 mV

Analog Signal Sensitivity:

0.3 μ V/graduation minimum at 7.5 Hz
 1.0 μ V/graduation typical at 120 Hz
 4.0 μ V/graduation typical at 960 Hz

A/D Sample Rate:

7.5 to 960 Hz, software selectable

Resolution:

Internal resolution: 8 million counts/8,000,000 23 bit
 Weight display resolution: 9,999,999

System Linearity:

$\pm 0.01\%$ full scale

Digital I/O:

Eight channels on CPU board; optional 24-channel I/O

Circuit Protection:

RFI, EMI, ESD protection

Serial Ports:

2 ports on CPU board support up to 115,200 bps
 Port 2: Full duplex RS-232 with handshaking
 Port 4: Full duplex RS-232, simplex 20 mA
 Keyboard port hard wired (Scan Code 1)
 Optional dual-channel serial expansion boards available
 Channel A: RS-232, RS-485, 20 mA
 Channel B: RS-232, 20 mA

Display:

Panel Mount: 3.8 in x 1.2 in (96 mm x 30 mm)
 Universal: 5.3 in x 1.5 in (133 mm x 39 mm)
 240 x 64 pixel, Transflective VGA liquid crystal display (LCD) module with adjustable contrast

Keyboard:

10-key (panel mount) membrane panel
 22-key (universal mount) membrane panel tactile feel
 Optional keyboard connection supported

Operating Temperature:

Legal: 14° F to 104° F (-10° C to 40° C)
 Industrial: 14° F to 122° F (-10° C to 50° C)

Weight:

Universal enclosure: 9.5 lb (4.3 kg)
 Panel Mount enclosure: 8.5 lb (3.9 kg)

Rating/Material:

NEMA Type 4X/IP66, stainless steel

Warranty:

Two-year limited warranty

Approvals:

NTEP CC 08-022, Class III/IIL 10,000d
 Measurement Canada AM 5677 10,000d Class III/IIHD
 OIML UK 2893 6,000/10,000d
 CE marked
 UL /c-UL Listed (universal)
 UL Recognized (panel mount)
 ROHS compliant

Approvals



Measurement
Canada
Approved





720i™ Series

Programmable HMI Indicator/Controller

Part Number/Price

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
PCE Software			
101230 †	720i Universal 115/230 VAC	12 lb	Consult
103459 ††	720i Universal 115/230 VAC, CE/OIML marked	12 lb	Consult
107708*	720i Universal, 9-36 VDC	12 lb	Consult
101229**	720i Panel Mount 115/230 VAC	12 lb	Consult
119116**	720i Panel Mount 115/230 VAC, CE/OIML marked	12 lb	Consult
107710*	720i Panel Mount, 9-36VDC	12 lb	Consult
Batch Software			
115447 †	720i Universal 115/230 VAC	12 lb	Consult
115448 ††	720i Universal 115/230 VAC, CE/OIML marked	12 lb	Consult
115449**	720i Panel Mount 115/230 VAC	12 lb	Consult

*DC/DC converter installed option, not UL approved

**Power cord sold separately




† NEMA 5-15 plug



†† CEE 7/7 plug

Options/Accessories

PART #	DESCRIPTION	PRICE
Option Cards		
67601	Digital I/O, 24-channel	Consult
67602	Analog output: selectable 0-10 V, 0-20 mA	Consult
67604	Serial, dual channel	Consult
93245	USB Port (PC connection only-replaces serial port 2)	Consult
Network Cards		
77142	Ethernet TCP/IP Port (replaces serial port 2)	Consult
71986	Ethernet TCP/IP module (installed in option slot)	Consult
87803	Ethernet IP (specifically for A-B PLC)	Consult
108671	Wireless LAN Card 802.11 A/B	Consult
68539	Allen-Bradley Remote I/O interface	Consult
68540	Profibus® DP interface	Consult
68541	DeviceNet™ interface	Consult
Hardware		
15436	Power cord for panel mount NEMA Type 5-15 plug	Consult
105382	Power cord for panel mount CEE 7/7 plug	Consult
93359	PS/2 keyboard	Consult
92777	Filter PreVent™ vent kit	Consult
19369	Start/stop switch box	Consult
83570	Clear protective overlay (package of five)	Consult
118975	Panel mount kit, for Universal	Consult
101923	Relay box enclosure, does not include relay	Consult
Manuals & Software		
103121	Installation manual	Consult
104033	720i toolkit CD	Consult
107622	720i ProAction Simulator CD	Consult
Primary Component Parts		
106788	CPU board assembly	Consult
101244	LCD display (panel mount) transfective	Consult
101239	Display board (with display for panel mount)	Consult
102888	LCD Display (universal) transfective	Consult
102887	Display board (w/o display for universal)	Consult
67613	AC power supply, 25 watt	Consult
97474	DC/DC converter 9-36 nominal, 25 watt	Consult
101256	Switch membrane for panel mount	Consult
101257	Switch membrane for universal	Consult

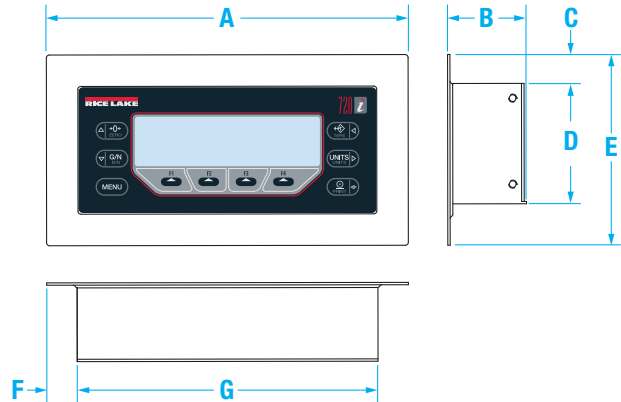


720i PANEL MOUNT DISPLAY DIMENSIONS

A 7.36 in (187 mm)	D 2.45 in (62 mm)	G 6.12 in (155 mm)
B 1.60 in (41 mm)	E 3.88 in (99 mm)	
C 0.59 in (15 mm)	F 0.62 in (16 mm)	

720i PANEL MOUNT CPU ENCLOSURE

(L x W x H): 12.75 x 6.05 x 2.14 in (324 x 154 x 5 mm)

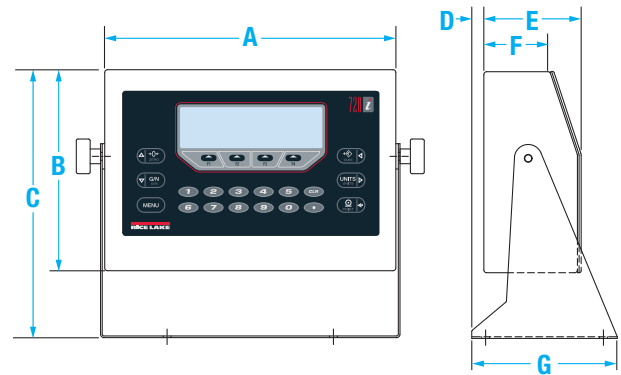

720i UNIVERSAL DIMENSIONS

A 10.50 in (267 mm)	D 0.44 in (11 mm)	G 5.25 in (133 mm)
B 7.25 in (184 mm)	E 3.51 in (89 mm)	
C 9.66 in (245 mm)	F 2.31 in (59 mm)	

MAPLE  SCALES
— SOLUTIONS THAT WEIGH —